

DB-10C and DB-4S, Dry block thermostats for spectrocells and strips

DB-10C Dry block is designed for sample thermostating in cuvettes before optical density measurements.

Together with any photometer **DB-10C** Dry block is the basic set for conducting biochemical indicators diagnostics methods (enzyme reaction intensity and metabolite concentration).

DB-4S Dry block is designed for sample thermostating in strips.


Specifications:

Temperature control range	+5°C above ambient ... +42°C
Temperature setting range	+25°C ... +42°C
Setting resolution	0.1°C
Stability	±0.1°C
Uniformity (at +37°C)	±0.3°C
Independent timer with sound signal	1 min – 96 hrs
Temperature display	LCD, 2x16 signs
Digital indication of temperature and time	
Block capacity:	
DB-10C:	10 cuvettes (10 mm optical pathway)
DB-4S:	36 x 0.2 ml microtubes
Overall dimensions	140 x 120 x 70 mm
Weight, not more	0.9 kg
External power supply	DC 12V, 1.25 A
Heating power	13 W


Catalogue number:

DB-10C	BS-010417-AAK
DB-4S	BS-010420-AAA

DB-10C for cuvettes

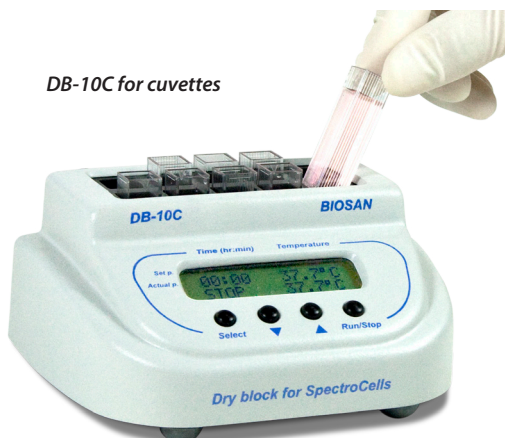

Heat up time for DB-10C and DB-4S:

from 25°C +  to 42°C

DB-4S for microtube strips



New!