


Bio RS-24, Mini-rotator for test tubes with timer

Mini-rotator **Bio RS-24** provides vertical rotation of the platform. The rotator is an ideal instrument for preventing blood coagulation in tubes and for fulfilment of procedures of extraction of biological components.

The device is simple to operate; it is designed as a low cost solution.

Rotator can be used in cold rooms or incubators, operating at ambient temperature range +5°C to +40°C. Low voltage external power supply (12 V) provides electrical safety in humid environment.

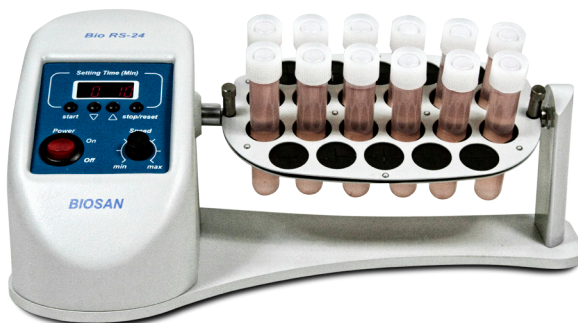

Specifications:

Vertical rotation	360°
Speed range	5–30 rpm
Digital timer with sound alarm	1 min to 23 hrs 59 min
Overall dimensions	310x 110x 175 mm
Weight, not more	1 kg
External power supply	DC 12 V, 500 mA

Catalogue number:

Bio RS-24 with platform PRS-22	BS-010133-AAG
PRS-4/12	BS-010117-AK
PRSC-18	BS-010117-EK

Bio RS-24 in operation



Platforms description:

Platform	Capacity	Tube Volume	Tube Diameter	Cat. number
① PRS-22 (standard)	22	up to 1.5 – 15 ml	up to 15 mm	BS-010117-FK
② PRS-4/12 (optional)	4 and 12	up to 50 and 1.5–15 ml	up to 30 and 15 mm	BS-010117-AK
③ PRSC-18 (optional)	18	up to 15 ml	up to 15 mm	BS-010117-EK


① PRS-22



② PRS-4/12



③ PRSC-18



PRS — series platforms are equipped with universal rubber clamps for different size tube fixation;

PRSC — series platforms have metal clamps able to hold heavier solutions (e.g. soil, sand).